

XE5-8 Wi-Fi 6/6E Indoor Access Point

802.11ax Five-Radio Tri-Band 8x8/4x4 High-density Access Point

QUICK LOOK :

- Five-radio Tri-Band W-Fi 6 and 6E
- 15.6 Gbps aggregate data rate
- Dual software-defined 5 GHz/6 GHz radios
- Dual 5 GbE uplink ports
- Microsoft Azure and Google G Suite integration



Wi-Fi Built for the Future

The XE5-8 is a five-radio Wi-Fi 6/6E 8x8/4x4 access point (AP) designed to deliver high-density, future-proof performance for building next generation wireless networks. With five user servicing radios, the XE5-8 delivers the highest density Wi-Fi 6 solution in the industry. Wi-Fi 6E support extends the capacity of Wi-Fi into the 6 GHz band, more than tripling the wireless spectrum available. With high-speed software-defined radios, the XE5-8 enables seamless transition to Wi-Fi 6E with the ability to easily change from dual-band to tri-band (2.4 GHz, 5 GHz, 6 GHz) support when sufficient 6 GHz clients are available. The XE5-8 is fully backward compatible with existing Wi-Fi technology, enabling simultaneous support of new high speed clients, legacy clients, low-bitrate IoT devices, and more in a single wireless infrastructure.

The XE5-8 comes with a Limited Lifetime Warranty providing return and repair service of the AP from date of purchase until the end of life of the product.

Cloud and on-premises management

XE5-8 operates with either Cambium Networks' XMS or cnMaestro™ management system. Choose the management system that best fits your needs and use the latest technology from Cambium Networks.



cnMaestro™ Essentials and X

- Fixed Wireless Broadband, Wi-Fi and Switching
- Help desk troubleshooting tools
- Cloud-managed guest access

XMS-Cloud

- Wi-Fi and Switching
- Real-time and historical analytics
- EasyPass™ user and device onboarding
- Application visibility and control

XE5-8 Wi-Fi 6/6E Indoor Access Point

Access Point Specifications

Note: Some features will be included on subsequent firmware releases.

FCC	Ch 1–11, 36–48, 52–64, 100–144, 149–165	Power	Max 59W 802.3bt powered device
ISED	Ch 1–11, 36–48, 52–64, 100–144, 149–165	Dimensions	300 mm x 300 x 58 mm (without bracket) (11.81 in x 11.81 x 2.28 in)
ETSI	Ch 1–13, 32–48, 52–64, 100–144	Weight	1.8 kg (3.97 lbs)
ROW (Individual country limits may apply)	Ch 1–14, 36–48, 52–64, 100–144, 149–173	Security	Kensington lock slot
6 GHz Channels		LEDs	Multi-color status LEDs
FCC/IC/ROW	Ch 1–233	Ambient Operating Temperature	0°C to 50°C (32°F to 122°F)
EU	Ch 1–93	Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Radios	Two: 4x4 5/6 GHz 802.11a/n/ac/ax, SW configurable to 5 or 6GHz operation Two: 4x4 5 GHz 802.11a/n/ac/ax, SW configurable to one 8x8 radio One: 4x4 2.4 GHz 802.11 b/g/n/ax BLE 4.1	Humidity	95% RH non-condensing
Wi-Fi	802.11 a/b/g/n/ac Wave 2/ax	MTBF	2,198,639 hours 25°C 791,890 hours at 50°C
SSID Security	WPA3, WPA2 (CCMP, AES, 802.11i), WPA2 Enterprise (802.1x/EAP), WPA PSK (TKIP), WEP, Open	Mount Options	Wall or ceiling, T-bar with included locking bracket, ceiling tile plate
Ports	2 x IEEE 10/100/1000/2500/5000 Mbps Ethernet 1 x USB 3.0	Certifications (Compliance)	FCC, IC, CE, EN 60601-1-2, EN 60950-1, IEC 62368-1 Safety, EN 60601-1-2 Medical EMC, EN 61000-4-2/3/5 Immunity, EN 50121-1 Railway EMC, EN 50121-4 Railway EMC, IEC 61373 Railway Shock & Vibration, EN 62311 Human Safety/RF Exposure, WEEE & RoHS
Antenna	6 GHz: 4 dBi, Omni 5 GHz: 5 dBi, Omni 2.4 GHz: 5 dBi, Omni		
Max EIRP	6 GHz: 30 dBm 5 GHz: 32 dBm 2.4 GHz: 31 dBm		

Max Data Rate

Radio Type	Band	Number of Radios	Max Data Rate Per Radio	Max Data Rate Total
4x4 SW-Defined	5 or 6 GHz	2	4.804 Gbps	9.608 Gbps
4x4	5 GHz	2	2.402 Gbps	4.804 Gbps
4x4	2.4 GHz	1	1.147 Gbps	1.147 Gbps
Total		5		15.559 Gbps

XE5-8 Wi-Fi 6/6E Indoor Access Point

Management

Note: Some features will be included on subsequent firmware releases.



Cambium Networks cnMaestro uses a distributed intelligence architecture with cloud-first management and edge-intelligent APs that self-optimize for the RF environment. cnMaestro delivers a single pane-of-glass management for Cambium broadband fixed wireless, cnMatrix Ethernet switches, enterprise-grade Wi-Fi APs and service provider residential routers.



Cambium Networks XMS leverages intelligent APs with an embedded edge controller to deliver edge services at any network density. XMS management plane is a cloud-first technology with a simple and easy-to-use interface delivering application L7 policy-based control, EasyPass BYOD secure access, and an MSP dashboard with drag-and-drop design.

XMS Management		cnMaestro Management
Deployment	Xirrus Management System (XMS-Cloud)	cnMaestro Cloud, cnMaestro on-premises
Services	Deep Packet Inspection (DPI) Application Visibility and Control for 2,000+ apps EasyPass Access Services	Monetized guest portal with design tools
APIs	RESTful management and statistics API Location API	RESTful management and statistics API Location API Webhooks
Captive Portal	Web Page Redirect, landing page, redirect to internal or external server, landing page and authentication EasyPass, Guest Ambassador Client isolation per SSID, per network Client rate limiting per SSID Click-through authentication Microsoft Azure and Google G Suite SSO integration	Hosted on cnMaestro or hosted on site AP Redirect to HTTP/RADIUS external portal/authentication Active Directory integration, Google, Facebook, Office 365 integration Data rate, time duration, data throughput limit Server DNS logging, Hotspot 2.0 Credit Card Merchant billing, ePSK, Vouchers
Accounting	RADIUS accounting, load balancing AAA servers, Dynamic Authorization COA, DM	

XE5-8 Wi-Fi 6/6E Indoor Access Point


Network Specifications

Operational Modes	Controllerless standalone Cloud managed cnMaestro or VM Cloud managed XMS	Mesh	Multi-hop, either band
WLAN	2500 clients per AP, 16 SSIDs WPA-TKIP, WPA2 AES, WPA3 SAE, WPA3 Enterprise, 802.1x, 802.11w PMF	Channel Selection	Multimodal channel selection with AutoChannel and AutoBand. Granular control of off-channel scan and channel selection
Captive Portal	Hosted in XMS-Cloud or cnMaestro VM On-AP hosted guest portal Redirect to HTTP/RADIUS Server DNS logging	RF Management	Multimodal RF optimization supporting AutoCell performed in the intelligent edge AP. Out-of-band RF spectrum analysis, radio self test network assurance, RF monitor with chn/noise/interference
Authentication Encryption	Hotspot 2.0 802.1x EAP-SIM/AKA, EAP-PEAP, EAP-TTLS, EAP-TLS, MAC authentication to local database or external RADIUS		Data rate pruning and minimum data rates
Accounting	RADIUS accounting, multiple AAA	Network	TCP connection log, NAT logging firewall, DHCP server, L2, L3 or DNS based access control, VLAN Pooling, RADIUS attribute VID VLAN per SSID per user
Scheduled WLAN	On/off by day, week, time of day	Band Steer Load Balance	Yes
Guest Access	EasyPass guest self-registration, guest Ambassador, ePSK or UPSK, Vouchers, Rate Limit, Splash page hosted in XMS-Cloud, cnMaestro, or on AP Client isolation per SSID, per network	Tunnel	L2TPv2, L2GRE, PPPoE
Data Limit	Client rate per SSID	Network and RF Management Tools	Wired and wireless remote packet capture, ZapD performance tool, rogue AP detection
Subscriber QoS	WMM	Services	NTP, Syslog, SNMP traps, DNS proxy, auto-off on WAN failure
Fast Roaming	802.11r, OKC, assisted roaming	API	RESTful management and statistics API Presence location APIs

Standards

Wi-Fi Protocols	VHT MCS rates, 16/64/256/1024/4096-QAM, 20/40/80/160 MHz
	TWT, Long OFDM Symbol, Transmit beamforming, Airtime Fairness, AMSDU, AMPDU, RIFS, STBC, LDPC, MIMO Power Save, MRC, BPSK, QPSK, CCK, DSSS, OFDM, OFDMA, UL/DL MU-MIMO
	IEEE 802.11 a/ac/ax/b/d/e/g/h/i/j/k/n/r/s/u/v

XE5-8 Wi-Fi 6/6E Indoor Access Point

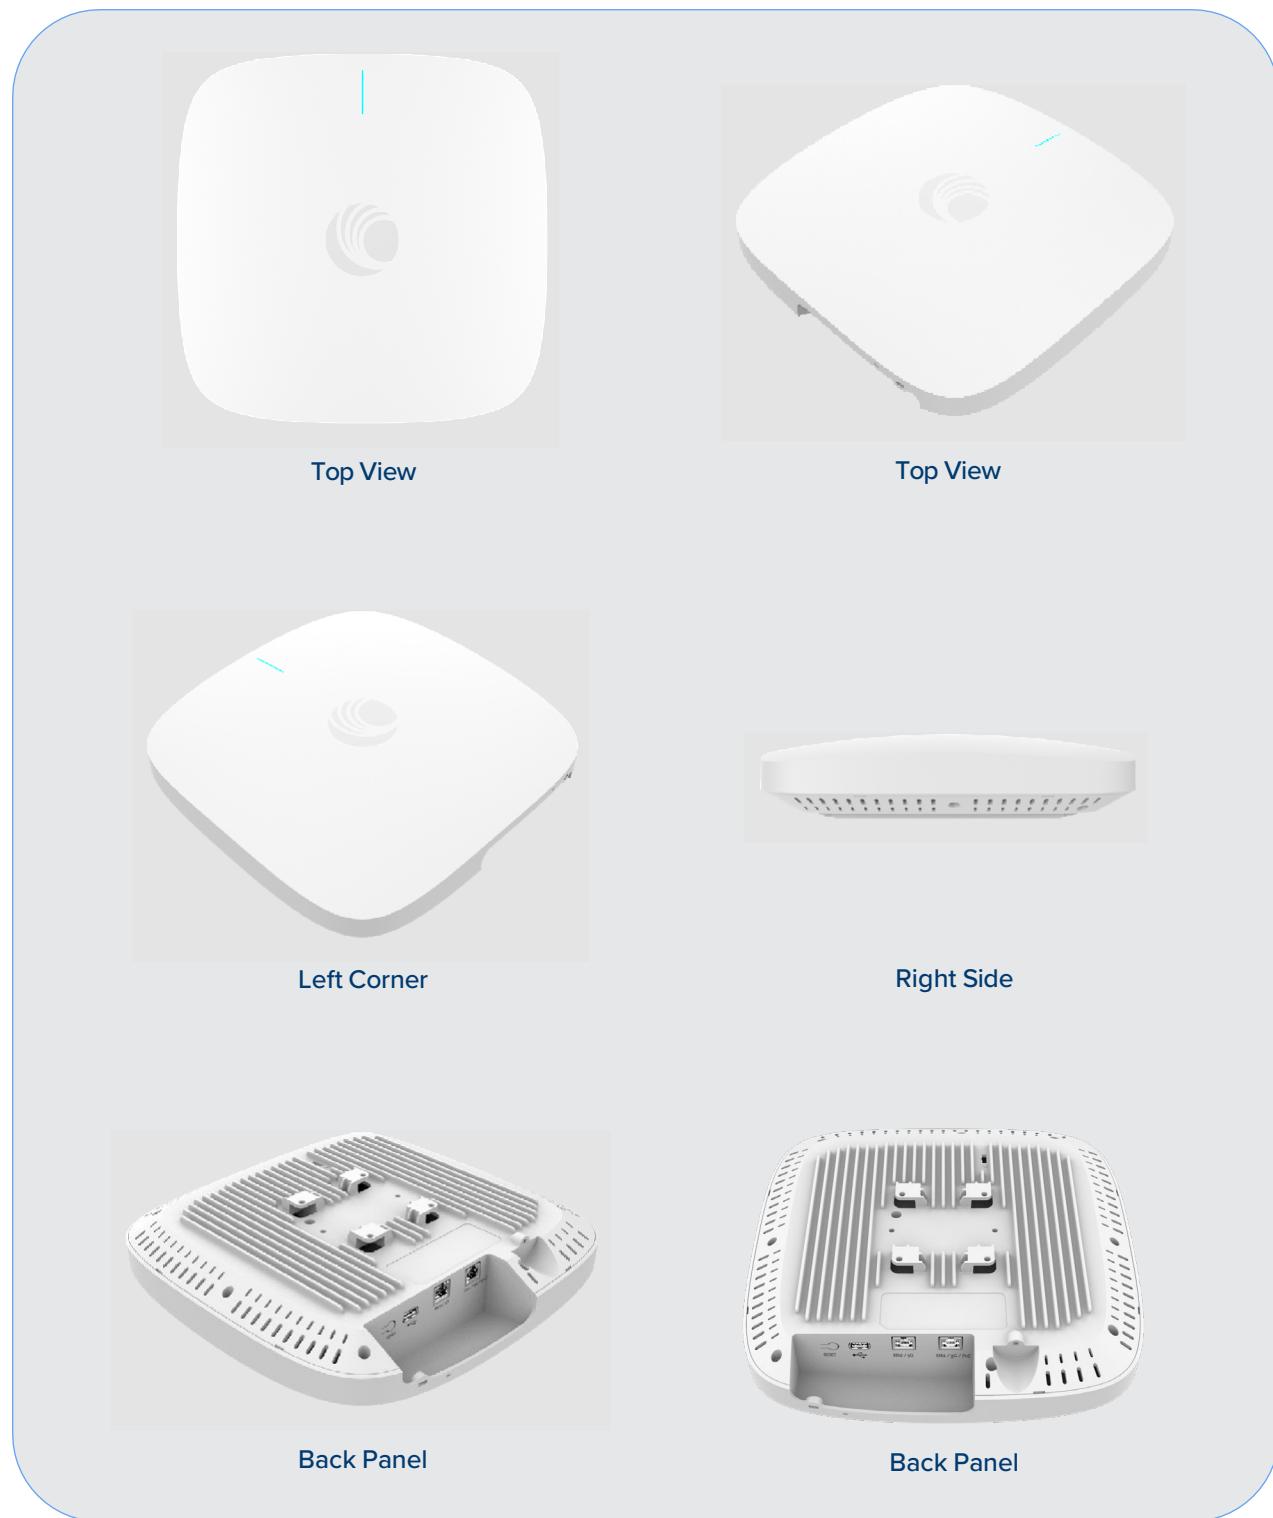

XE5-8 Wi-Fi 6/6E Indoor Access Point

Antenna Patterns

4x4 2.4 GHz Azimuth



4x4 2.4 GHz Elevation




4x4 5 GHz Azimuth




4x4 5 GHz Elevation



8x8 5 GHz Azimuth

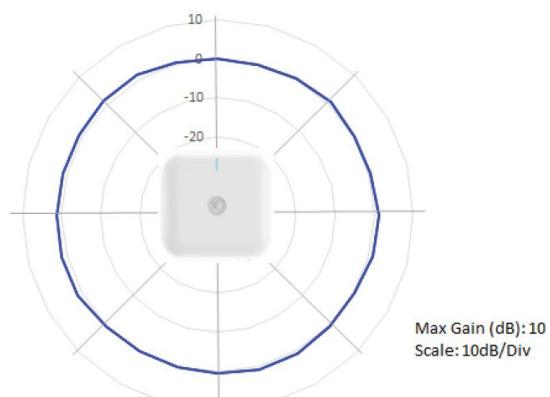


8x8 5 GHz Elevation

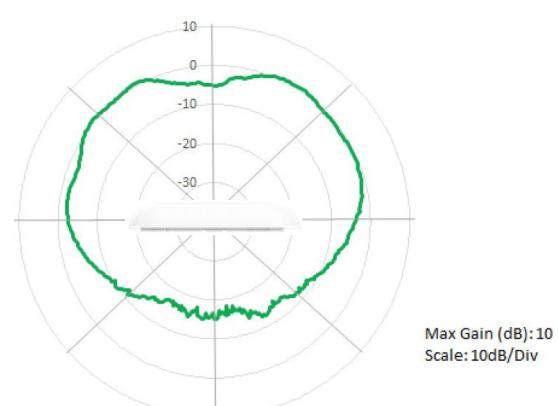


XE5-8 Wi-Fi 6/6E Indoor Access Point

Antenna Patterns, Continued

4x4 6 GHz Azimuth

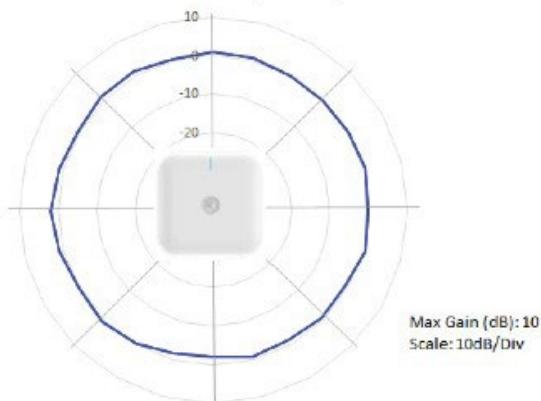

4x4 6 GHz Elevation

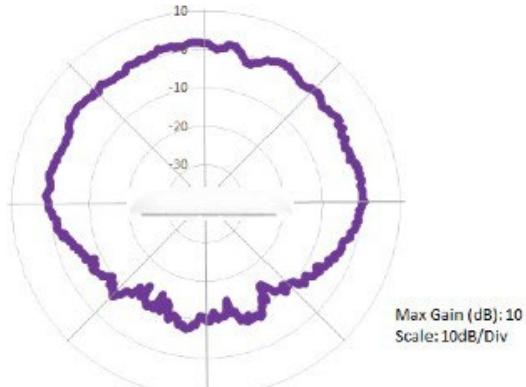

XE5-8 Ordering Information

Regulatory Model	XE5-8
XE5-8X00A00-US	Indoor 5-Radio Wi-Fi 6/6E Access Point. SDR 802.11ax 8x8/4x4, US
XE5-8X00A00-EU	Indoor 5-Radio Wi-Fi 6/6E Access Point. SDR 802.11ax 8x8/4x4, EU
XE5-8X00A00-RoW	Indoor 5-Radio Wi-Fi 6/6E Access Point. SDR 802.11ax 8x8/4x4, RoW
XE5-8X00A00-CA	Indoor 5-Radio Wi-Fi 6/6E Access Point. SDR 802.11ax 8x8/4x4, CA
N000000L142A	PoE injector, 60W, 5 GbE, Indoor, Energy Level 6 Supply
AX-E510RBKT-WW	Shock mount bracket
AX-WALLBRKT-WW	Wall Mount L-Bracket for XV and XE series APs. Use to mount the AP horizontally.
AX-XE5BRKT-WW	Spare Mounting bracket kit for XE5-8X access point. Qty 5

cnMaestro X Ordering Information

MSX-SUB-T3-1	cnMaestro X for Enterprise: Advanced management and includes Cambium Care Pro Support; 1-year term
MSX-SUB-T3-3	cnMaestro X for Enterprise: Advanced management and includes Cambium Care Pro Support; 3-year term
MSX-SUB-T3-5	cnMaestro X for Enterprise: Advanced management and includes Cambium Care Pro Support; 5-year term
MSX-SUB-T3-M	cnMaestro X for Enterprise: Advanced management and includes Cambium Care Pro Support; 1-month term

XE5-8 Wi-Fi 6/6E Indoor Access Point

XMS and EasyPass Subscription Information

XMSC-SUB-4R-1	XMS-Cloud 1-year subscription: 4 or 5-radio AP with EasyPass Guest Self-Registration and Guest Ambassador modules and Cambium Care Advanced Support
XMSC-SUB-4R-3	XMS-Cloud 3-year subscription: 4 or 5-radio AP with EasyPass Guest Self-Registration and Guest Ambassador modules and Cambium Care Advanced Support
XMSC-SUB-4R-5	XMS-Cloud 5-year subscription: 4 or 5-radio AP with EasyPass Guest Self-Registration and Guest Ambassador modules and Cambium Care Advanced Support
EASY-SUB-4R-1	EasyPass 1-year subscription for a 4 or 5-radio AP operating with XMS-Cloud
EASY-SUB-4R-3	EasyPass 3-year subscription for a 4 or 5-radio AP operating with XMS-Cloud
EASY-SUB-4R-5	EasyPass 5-year subscription for a 4 or 5-radio AP operating with XMS-Cloud

Cambium Care Support Information

CCADV-SUP-XE5-8-1	Cambium Care Advanced, 1-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCADV-SUP-XE5-8-3	Cambium Care Advanced, 3-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCADV-SUP-XE5-8-5	Cambium Care Advanced, 5-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCPRO-SUP-XE5-8-1	Cambium Care Pro, 1-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support and SW updates
CCPRO-SUP-XE5-8-3	Cambium Care Pro, 3-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support and SW updates
CCPRO-SUP-XE5-8-5	Cambium Care Pro, 5-year support for one XE5-8 Wi-Fi 6/6E AP. 24x7 TAC support and SW updates
CCADV-UPG-XE5-8-1	Cambium Care Advanced Add-on to cnMaestro X, 1-year support for one XE3-4. 24x7 TAC support, SW updates, and NBDS advance replacement for HW
CCADV-UPG-XE5-8-3	Cambium Care Advanced Add-on to cnMaestro X, 3-year support for one XE3-4. 24x7 TAC support, SW updates, and NBDS advance replacement for HW
CCADV-UPG-XE5-8-5	Cambium Care Advanced Add-on to cnMaestro X, 5-year support for one XE3-4. 24x7 TAC support, SW updates, and NBDS advance replacement for HW

LIMITED LIFETIME WARRANTY

Cambium Networks XE5-8 Wi-Fi 6/6E Access Point includes a limited lifetime hardware warranty for a period of 5 years after end of sale.

ABOUT CAMBNIUM NETWORKS

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences, and device connectivity, with compelling economics. Our ONE Network platform simplifies management of Cambium Networks wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We make connectivity that just works.